

# SMART<sup>1</sup>CLAD™



**PUREPINE**  
MOULDINGS

**PUKEPINE**  
SAW MILLS



# Key Features

## Treatment and coatings

### LOSP H3.1 Treatment

- Proven treatment approved to NZ3602 standards
- Resistance to fungal decay and insect attack
- The ideal treatment when exacting dimensions of weatherboards are required



### Premium UV Sealer

- Environmentally Friendly – Solvent free technology
- Free of grain raising
- Fully encapsulated boards
- Dimensionally stable
- Resistant to resin and tannin bleed
- Resistant to water ingress
- Hardwearing 100% solids sealer

### Double Primed

- Two coats of acrylic primer for peace of mind
- 100% Acrylic water-based technology
- Environmentally friendly
- Health and safety conscious with low VOC, low ammonia & free of formaldehydes
- Smooth and silky finish transferring to excellent finish through topcoating

## Profile Dimensions

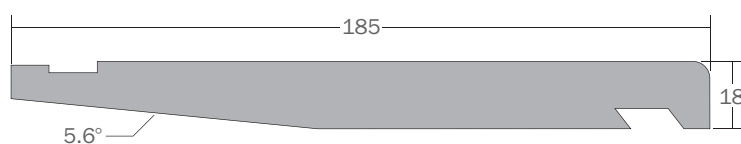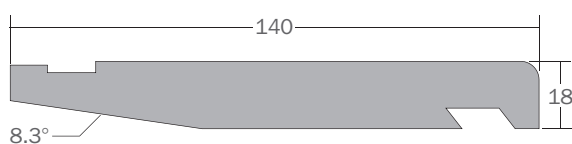


Available in handy 50 piece trade packs

## Start well with a SmartClad Starter Board

SmartClad starter boards make it easier to get the perfect job.

No more guess work required.

- Position the starter board so that it overlaps the concrete base of foundation by at least 50 mm and confirm that the board is level with a laser or string line.
- Nail the starter board to the bottom plate of the framing 75 to 100 mm up from the bottom base board.
- For best results, use a pre-shaped scribe as a set out guide to ensure the weatherboards line up with heads of windows.





# Storage, preparation and installation

- Ensure that SmartClad weatherboards are correctly stored and protected prior to installation.
- All weatherboards must be stored indoors or under a totally-weatherproof cover at all times.
- The wrap that protects SmartClad when it is delivered is only a shower-proof transit cover.
- It is not suitable for use as a weatherproof cover.
- To maintain board stability, it is recommended that you apply an undercoat of paint to each weatherboard before installation. Choose paint with a colour that has a light reflective value (LRV) of 45% or more.

- **Prior to Weatherboard Installation** – The flexible wall underlay (or rigid wall underlay) must be fitted in accordance with manufacturer's instructions. In particular it is essential that the underlay is dressed into the window/door opening, and the flashing tapes fitted to the jambs and sills and at the corners of the opening head.
- **Cavity Construction**
  - Where cavity construction is specified, cavity battens must be installed over the building wrap to the wall framing at maximum 600 mm centres where the studs are at 600 mm centres or at 400 mm centres when studs are at 400 mm centres. Refer to BRANZ Bulletin Number 475 for further information.
  - Where studs are at greater than 450 mm centres, a building wrap support (e.g. polypropylene strap) must be installed over the building wrap at maximum 300 mm centres horizontally.
- **Cavity starter strips** – must be fitted to close off the cavity from vermin. The strip should be in accordance with NZBC Acceptable Solution E2/AS1 Paragraph 9.1.8.3.
- **Flashings** – where required, flashings such as corner, sill and saddle flashings must be installed prior to weatherboard installation.
- **Joining Weatherboards** – Fix weatherboards in full lengths where possible. Where joints are unavoidable, soakers are the preferred method however if soakers are not an option then scarf the weatherboard at 45° over a stud/cavity batten and fix with one nail fixing through the overlapping board. Prime the cut ends of all scarf joints with two coats of premium alkyd timber primer or Smartseal primer before fixing.
- **Fitting Window And Door Joinery** – Ideally, weatherboards should be fitted till the top of the opening is reached, then the joinery fitted. This allows for the boards to be fitted beneath the window flange and for the head flashing to be fixed over the window, then subsequent boards fixed over the head flashing.

- **Prime Cut Ends** – prior to fitting weatherboards or other timber trims, prime the cut ends with two coats of premium alkyd timber primer or Smartseal spray primer.
- **Nailing** – use 75 x 3.15 mm hot-dip galvanised or stainless steel ring shank jolt head nails. The nail must be located 40 mm above the bottom edge of the overlap board and be punched a maximum of 2 mm below the surface of the board. Start fixing the weatherboards at the middle of their length and work outwards to the ends. Pre-drill all nail fixings within 50 mm of the end of the board.
- **External Corners** – are finished by either using the SmartClad™ box corners or SmartClad™ corner soakers.
- **Internal Corners** – are finished by either scribing and notching alternate weatherboards or the SmartClad™ Internal Corner Scriber can be fitted.
- **Facings** – After the joinery and weatherboards are installed, the jambs of the window are finished with either a SmartClad™ Pre-Scribed Scriber or Pre-Scribed Facings.
- **SmartClad™ Sill** – is an optional timber sill board that can be fixed to the sill of windows for aesthetic purposes.
- **Eaves Moulding** – is a cover trim to finish the junction between the top of the wall and the soffit.
- **Air Seals** – A nominal 5 to 10 mm gap must be left between the joinery reveal and the framing. A PEF backing rod is inserted and the gap sealed with a self-expanding polyurethane foam or sealant, in accordance with NZBC Acceptable Solution E2/AS1 Paragraph 9.1.6.
- **Finishing** – Prior to painting the boards must be cleaned down, and any nail holes filled. The paint coating manufacturer's instructions must be followed at all times for application of the paint finish. SmartClad™ Bevelback weatherboards must be painted as soon as practicable following fixing. The use of a high quality acrylic top coat is advised. **Ensure a minimum of 150 wet microns is applied.**

All exposed faces, including top edges at sills and all bottom edges of SmartClad™ weatherboards and accessories must be finished with at least two coats of an exterior grade latex acrylic paint complying with any of Parts 7, 8, 9 or 10 of AS 3730. If SmartClad™ weatherboards are exposed to the weather for more than 45 days, they must be re-primed with one coat of alkyd primer prior to the application of the finishing coats. The recommended drying time between coats and the temperature limitations for application must be followed.

*(Note: For SmartClad Bevelback weatherboards, It recommended using a paint with a colour which has a Light Reflective Value (LRV) of greater than or equal to 45%)*



| Product                        | Code   | Size                       | Length     |
|--------------------------------|--------|----------------------------|------------|
| Starter Board                  | SB140  | 140mm x 34mm               | 6.0 metres |
| Starter Board                  | SB185  | 185mm x 32mm               | 6.0 metres |
| Bevelback Weatherboard         | BBW140 | 140mm x 18mm               | 6.0 metres |
| Bevelback Weatherboard         | BBW185 | 185mm x 18mm               | 6.0 metres |
| Pre-shaped Scribe              | SPS140 | 40mm x 10mm                | 5.4 metres |
| Pre-shaped Scribe              | SPS140 | 40mm x 18mm                | 5.4 metres |
| Pre-shaped Scribe              | SPS185 | 40mm x 10mm                | 5.4 metres |
| Pre-shaped Scribe              | SPS185 | 40mm x 18mm                | 5.4 metres |
| Pre-shaped Facing              | SPF140 | 88mm x 34mm or 42mm x 34mm | 5.4 metres |
| Pre-shaped Facing              | SPF185 | 88mm x 34mm or 42mm x 34mm | 5.4 metres |
| Pre-shaped Box Corner (Male)   | SCBC   | 88mm x 18mm                | 5.4 metres |
| Pre-shaped Box Corner (Female) | SCBC   | 100mm x 18mm               | 5.4 metres |
| SmartClad Sill                 | SCS    | 55mm x 42mm                | 5.4 metres |
| Internal Corner Board          | SISCS  | 40mm x 40mm                | 5.4 metres |
| Flat Soaker Galv.              | FSG    | 140mm or 185mm             | 25 per box |

# SMART'CLAD™

PO Box 41, Te Puke 3153, New Zealand **P** +64 7 573 9161 **F** +64 7 573 4189

[www.smartclad.co.nz](http://www.smartclad.co.nz)

**PUREPINE**  
MOULDINGS

**PUKEPINE**  
SAWMILLS

